


滾珠螺桿保護套 (規格表二)

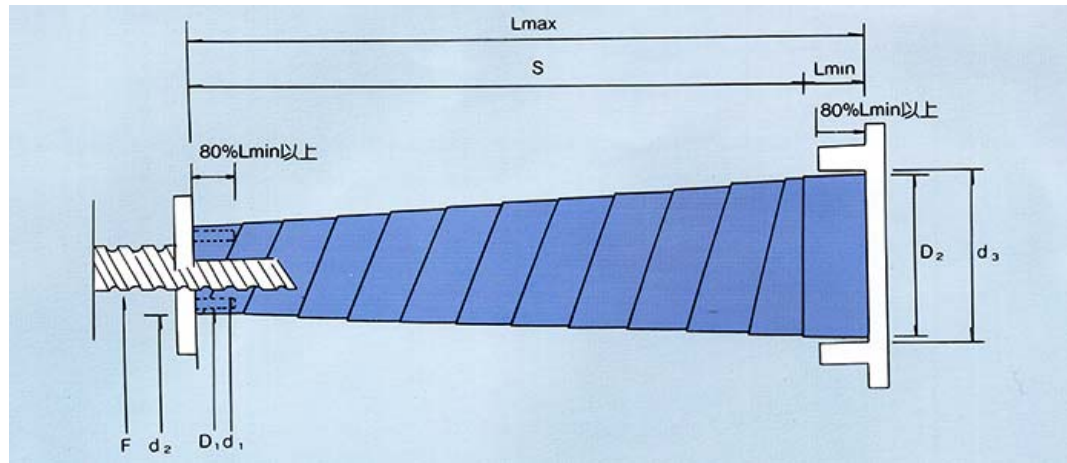

訂購時應註明項目

Specification 規格	D2 內徑	Lma- 最大長度	S(Stroke) 伸縮行程	Lmi- 最小長度	D2±1m/m 外徑
45-350-50	45	350	300	50	61
45-450-50	45	450	400	50	65
45-750-60	45	750	690	60	75
45-1000-100	45	1000	900	100	80
45-1050-60	45	1050	990	60	85
45-1200-100	45	1200	1100	100	84
45-1500-75	45	1500	1425	75	97
50-450-50	50	450	400	50	70
50-750-60	50	750	690	60	77
50-900-60	50	900	840	60	85
50-900-75	50	900	825	75	85
50-1100-75	50	1100	1025	75	91
50-1300-75	50	1300	1225	75	89
50-1300-75	50	1300	1225	75	89
50-1300-100	50	1300	1200	100	83
50-1500-100	50	1500	1400	100	87
50-1800-100	50	1800	1700	100	95
50-2100-120	50	2100	1980	120	102
60-650-60	60	650	590	60	86
60-750-60	60	750	690	60	90
60-900-60	60	900	840	60	104
60-1100-100	60	1100	1000	100	92
65-1500-100	60	1500	1400	100	102
60-1700-120	60	1700	1580	120	104
60-2100-120	60	2100	1980	120	113
60-2500-120	60	2500	2380	120	119
65-1100-100	65	1100	1000	100	97
70-5500-75	70	550	475	75	92
70-750-75	70	750	675	75	105
70-1100-75	70	1100	1025	75	114
80-2200-120	80	2200	2080	120	145
90-900-100	90	900	800	100	130
90-1300-100	90	1300	1200	100	140